

CAGES

Form Lock

Standard Specifications



Number Of Vertical Wires



Wire Ga. 9-7



Wire Ga. 12-11



Wire Ga. 9-7



Wire Ga. 11-12



Wire Ga. 9-7



Wire Ga. 13-11




Wire Ga. 11-9



Wire Ga. 13-11

Wire Gauge Full Scale

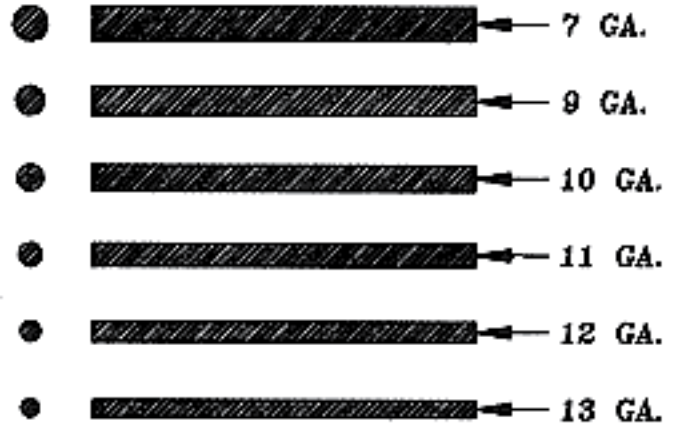

Materials and Finishes Available

MATERIALS:

- C.R.S.
- GALVANIZED STEEL WIRE
- 304 S.S.
- 316 S.S.
- INCONEL 600 OR 601

FINISHES:

- ELECTROSTATIC SPRAY EPOXY
- 1.5 TO 6 MILS THICK
- SERVICE TEMPERATURE 250F - 350F
- FLUIDIZED RED EPOXY
- 8 T 12 MILS THICK
- VINYL 1,5 TO 8 MILS THICK
- SERVICE TEMPERATURE 200 F
- ZINC .0002 TICK
- SERVICE TEMPERATURE 500 F

FOR MORE INFORMATION OR TO PLACE AN ORDER CONTACT IAC TODAY


PB202004

4800 Lamar Avenue / Mission, KS 66202 / USA 800.334.7431


www.iac-intl.com




Cage Tops




Slotted




Roll Band




Snap Band



Split Ring





All Wire



Collar Venturi



Cage Bottoms




Welded Cup



Crimped Cup



Snap Cup



Wire Formed